

FAUCET INSTALLATION

1. A hole with a diameter of 1-3/8" should be drilled through counter top, with hole center at least 1-1/2" away from any obstructions, both above and below the counter top.
2. Install faucet and filter assembly into hole.
3. Screw large plastic wing nut onto filter housing from below the counter, then tighten while making sure that the rotational position of the unit is set to your preference.
4. Turn off cold water angle stop valve under the sink and open then close cold water faucet to release the inline pressure.
5. Install black T-fitting either between the cold water angle stop valve and flex line going to faucet, or between cold water flex line and sink faucet. Make sure the threads match before installing (1/2" pipe thread).
6. Attach one end of the provided water feed tubing to the T-fitting and the other end to the ball valve located at the bottom of the filter housing.
7. Make sure all connections are tight then turn on cold water angle stop valve and check for any leaks.
8. Purge (clean out) your new filtered water system by turning the faucet and letting the water run for about 2 minutes. Then you can enjoy clean, pure, and healthy drinking water!

Tee connection between sink faucet and flex line




Red supply line attaches with quick connect fitting to Tee

Tee connection between angle stop and flex line



Red supply tubing attaches with quick connect fitting to Tee

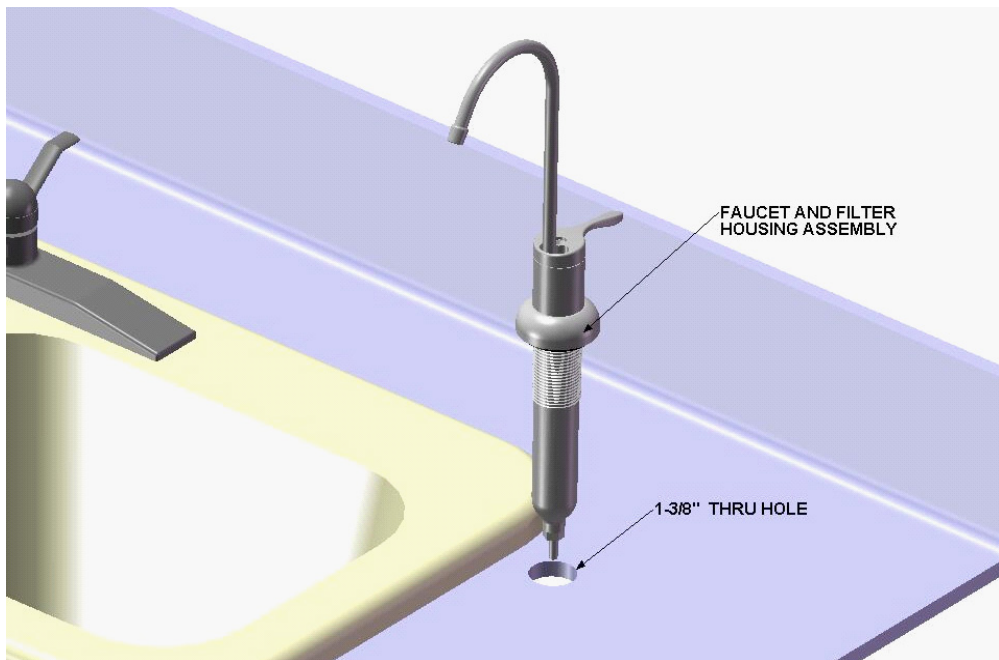


FAUCET AND FILTER HOUSING ASSEMBLY

1-3/8" THRU HOLE

CARTRIDGE REPLACEMENT

1. Close ball valve at the bottom of the filter housing (under counter).
2. Purge excess water out of the system by turning on faucet until there is no water coming out.
3. Carefully grasp the faucet base and turn counter-clockwise $\frac{1}{4}$ turn to unlock faucet and cartridge from the filter housing.
4. Lift faucet and cartridge out of the filter housing then pull cartridge out from the bottom of the faucet and replace with new cartridge.
5. Lower faucet and new cartridge into filter housing and turn clockwise $\frac{1}{4}$ turn to lock faucet back into the filter housing.
6. Open the ball valve and purge new filter cartridge for about 2 minutes. Enjoy clean, pure, and healthy drinking water again!

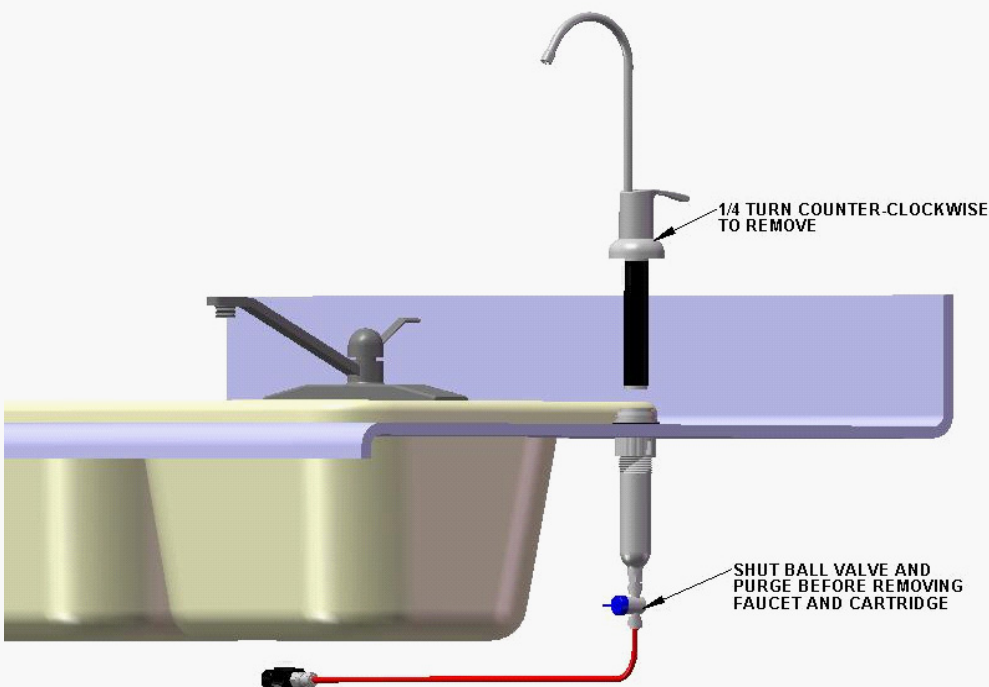

USA/Canadian Markets
Joneca Corporation
tel: 714.993.5997 fax: 714.993.2126
www.Joneca.com ContactUs@Joneca.com

